
Ben Davis

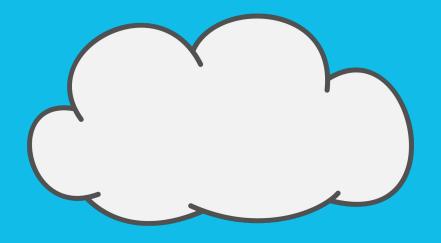

CI/CD Cloud Presentation Feb 2023

Project Goals

Deploy a website that is:

- Available globally with low latency
- Dynamically scalable in each individual AZ/server
- Able to be updated simultaneously across regions
- Able to automatically deploy new features from a code Repo
- Able to be monitored for performance issues

Services Used

AWS EC2 Amazon Linux Servers: To host Jenkins, Apache, Maven, and Ansible

Jenkins: To pick up Github Webhook, Package Webapp, and Deploy to Apache Web Server

AWS Security Groups, Firewalls, Generated SSH Keys

Amazon CloudWatch Dashboard to Monitor completed Infrastructure

Ansible: To configure Linux Servers

Terraform: To provision servers and configure proper security and geographic location

Maven: To package Webapp

Docker/AWS ECR: To host multiple Web Servers





















It's Digital Transformation time.

Due to the COVID pandemic, the business wants to shift from on-premise treatment to digital training for practitioners.

One critical element is the online presence, which is starting to draw attention from other English speaking countries (US, UK, Canada, Australia, NZ)

The increased traffic is causing service outages, and there are excessive lag times in distant countries.

Due to the low capital investment cost, AWS Cloud is a great option for hosting the website (and other components) with increased availability.

Provision Resources

Using Terraform we will create Instances:

1 to run Ansible

1 to run Jenkins

6 to run Docker and Apache Web Server

8 SSH Keys

Make sure all servers are in security groups that can talk to each other. (Open on port 22)

```
main.tf X
🦖 main.tf > 😭 resource "aws_instance" "my_west_server" > 🕪 ami
       data "aws ami" "amazon-linux-2-west" {
         most recent = true
         provider = aws.west
         owners = ["amazon"]
         name = "owner-alias"
         values = ["amazon"]
         filter {
         values = ["amzn2-ami-hvm*"]
       resource "aws instance" "my east server" {
                        = "${data.aws ami.amazon-linux-2.id}"
         instance type = "t2.micro"
           Name = "Server-Fast"
       resource "aws instance" "my west server" {
         provider = aws.west
                        = "${data.aws ami.amazon-linux-2-west.id}"
         instance_type = "t2.micro"
         tags = {
           Name = "Server-West"
       output "east public ip" {
           value = aws instance.my east server.public ip
 PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL JUPYTER
                                                                          ) bash
 aws instance.my west server: Creation complete after 23s [id=i-08920c008
 0a9bfca31
                                                                          O wsl
 aws_instance.my_east_server: Still creating... [30s elapsed]
 aws instance.my east server: Creation complete after 32s [id=i-0da5a7bb1
6fda24fb]
 Apply complete! Resources: 2 added, 0 changed, 0 destroyed.
 Outputs:
 east public ip = "52.91.214.23"
 west public ip = "54.193.35.14"
ben@LAPTOP-P7Q2PULR:/mnt/c/Users/Benjamin/AWSCookbook/Terraform/alias$
```

Since we are working in multiple AZs, each server also needs its own load balancer, target group, and listener, and autoscaling group.

Some resources need to be created and attached using AWS and Terraform.

The instances depend on the load balancer and autoscaling group (and security groups) so we can use 'depends_on' to make sure that the supporting infrastructure is created before we provision the servers.

```
# Filter for instances in AZ1
 target_type = "instance"
 target_group_targets {
  availability_zone =
"${data.aws_availability_zones.available.na
mes[0]}"
# Define the listener for AZ1
resource "aws_lb_listener" "listener_az1" {
 load_balancer_arn = aws_lb.lb_az1.arn
```

```
# Define the load balancer for AZ1
resource "aws_lb" "lb_az1" {

# Define the target group for AZ1
resource "aws_lb_target_group" "tg_az1" {
```

The instances are now scalable and highly available.

Now that our servers are up and running and supported by various AWS services, it's time to actually install our software on them.

First we will work with our 'Management' node and our 'Deployment' server, which will be in charge of configuring our outward facing web servers.

Install Ansible

To help us manage the other servers.

Install Maven

We will need it to run the Jenkins pipeline.

sudo yum install -y ansible (Server 1)

sudo amazon-linux-extras install -y maven (Server 2)




https://aws.amazon.com/amazon-linux-2/ 4 package(s) needed for security, out of 11 available Run "sudo yum update" to apply all updates. [ec2-user@ip-172-31-86-202 ~]\$ ■

Install Jenkins

The Jenkins server will be the powerhouse of the CI/CD Pipeline.

Jenkins will be connected to our Github repo hosting our Web app.

Jenkins will rely on Maven package manager to package our app and deploy it to the web servers.

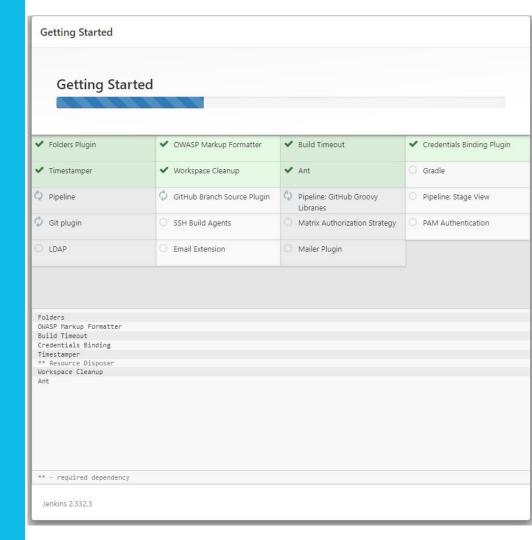

Configuring Jenkins

The source file must be specified

The remote directory to deliver the package must be specified

The build step including Maven packaging must be specified

The proper version and file path of Git and Maven must be specified

Creating the Jenkins Pipeline

Jenkins must be told which version of Maven to use.

Jenkins must be configured to publish via SSH connection.

The Pipeline must be built step by step.


The pipeline we are using must also be configured to use Github, and it must be pointed toward the appropriate repo which contains the web app source code.

The pipeline must be pointed toward the web servers, and have access.

How does the Pipeline work?

Once the pipeline is installed, it can be triggered automatically based on the conditions set:

- A new commit is created in the specified repository.
- 2. Jenkins gathers the files.
- 3. Jenkins manages Maven, which packages the files into a .war
- 4. The package is tested for bugs.
- 5. The .war package is deployed to the specified Web Servers

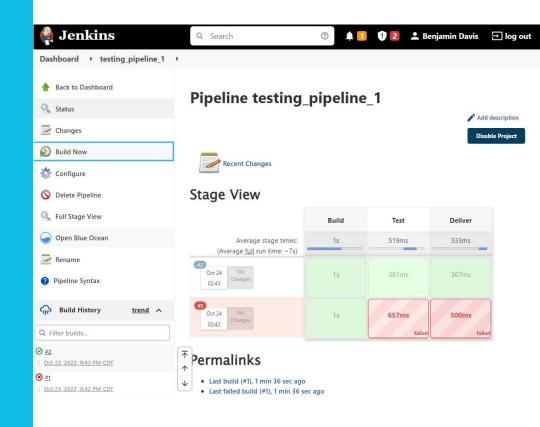

Now where are the Web Servers?

Before we create the pipeline, we need live web servers which are capable of hosting our web app package. On our 6 remaining servers we will...

Install Docker

So that we can scale our web servers.

sudo yum install docker (Servers 3-8)

And we will use Ansible to help speed up installation, as well as automate any future maintenance.

Automation with Ansible

Installing Docker manually would be fine, except we don't want to do the same process 6 times. It's time to put our Ansible server to work by creating a YAML script which will run commands on our remote machines.

If we create an inventory file containing the 6 IP addresses we are targeting, we can run a script using the following command:

ansible-playbook -i inventory.ini docker-install.yml

So what should the script do?

The first step is to get Docker running on each server.



PLAY RECAP ********* OK= 6

docker-install.yml

- name: Install Docker on EC2 instance

hosts: ec2 become: true

tasks:

- name: Install Docker

yum:

name: docker state: present

- name: Start Docker service

service:

name: docker state: started

The second script will install Apache Web Server in the container.

Docker will be the foundation of our web servers.

It makes it fast and easy to install Apache,

And has built in support for auto-scaling in the event of traffic spikes.

Each instance in a separate AZ is has the potential to be its own self contained autoscaling group which can dynamically respond to demand.

ansible-playbook -i inventory.ini docker-install.yml

apache-install.yml

- name: Deploy Apache web server in Docker

container

hosts: ec2

become: true

tasks:

- name: Pull Apache Docker image

docker_image:

name: httpd:latest

state: present

- name: Start Apache Docker container

docker_container:

name: my-apache-container

image: httpd:latest

state: started

ports:

- "80:80"

Double check the IP address. We are live!

Test Page

This page is used to test the proper operation of the Apache HTTP server after it has been installed. If you can read this page, it means that the Apache HTTP server installed at this site is working properly.

If you are a member of the general public:

The fact that you are seeing this page indicates that the website you just visited is either experiencing problems, or is undergoing routine maintenance.

If you would like to let the administrators of this website know that you've seen this page instead of the page you expected, you should send them e-mail. In general, mail sent to the name "webmaster" and directed to the website's domain should reach the appropriate person.

For example, if you experienced problems while visiting www.example.com, you should send e-mail to "webmaster@example.com".

If you are the website administrator:

You may now add content to the directory /var/www/html/. Note that until you do so, people visiting your website will see this page, and not your content. To prevent this page from ever being used, follow the instructions in the file /etc/httpd/conf.d/welcome.conf.

You are free to use the image below on web sites powered by the Apache HTTP Server:



Now we can finalize and run the pipeline.

The pipeline needs to be configured to deploy in parallel to each of the 6 servers.

We can use a Jenkinsfile script to give it instructions.


The 'stage' and 'parallel' commands will help.

```
stage('Deploy') {
  parallel {
     stage('Deploy to web1') {
       steps {
          sh 'scp target/*.war user@web1:~/'
     stage('Deploy to web2') {
       steps {
          sh 'scp target/*.war user@web1:~/'
     stage('Deploy to web3') {
       steps {
          sh 'scp target/*.war user@web1:~/'
```

All we have to do is commit our Web app to Github, the pipeline will be triggered!

```
Benjamin@LAPTOP-P702PULR MINGW64 ~/HTML5 (master)
$ git push
Enumerating objects: 13, done.
Counting objects: 100% (13/13), done.
Delta compression using up to 8 threads
Compressing objects: 100% (7/7), done.
Writing objects: 100% (7/7), 158.19 KiB | 15.82 MiB/s, done.
Total 7 (delta 3), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (3/3), completed with 3 local objects.
To https://github.com/benjamindavisdc/benjamindavisdc.github.io/
   dcd8109..70f3cb5 master -> master
Benjamin@LAPTOP-P7Q2PULR MINGW64 ~/HTML5 (master)
```

Hit refresh on each Apache server. The website should now be live.

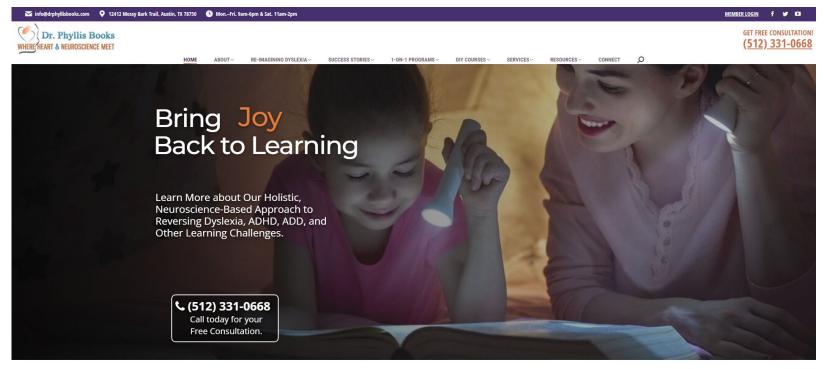













And the best part is...


From now on, any time we update the source code in our Repo, the packaging, testing, and deployment will happen again automatically.

Within ~2000ms, our updated site will be running globally.

Now that the deployment configuration is complete, we have a few more things to do to make sure the instance stays healthy.


Amazon Cloudwatch will help us monitor our servers.

Cloudwatch has a suite of features including Visualized Dashboards that show KPI metrics in real time, alerts that can notify administrators, and detailed logs to help investigate errors.

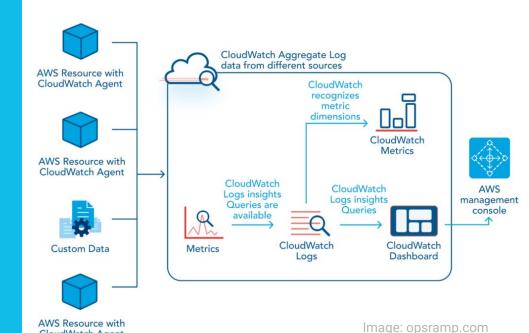


CloudWatch Agent

Instance: i-0f3bc674e5b8f99b5 (Web Server 1)

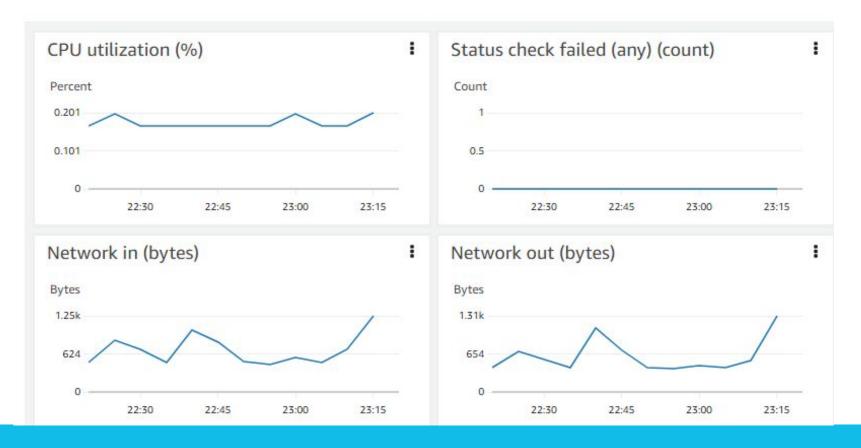

Monitoring will show us the performance of each server.

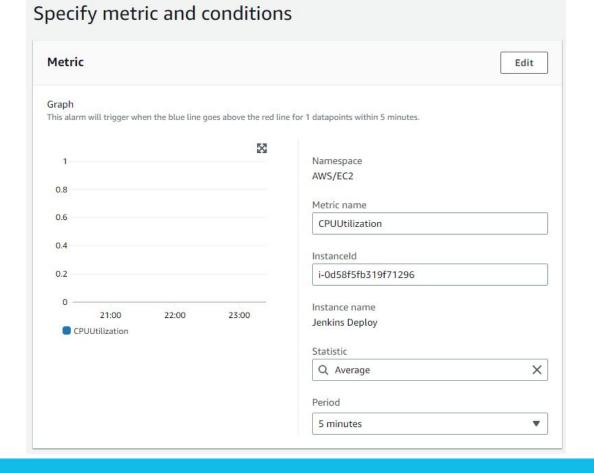

We can configure alarms to warn if things (will soon) go out of control.

Deployment is complete!

Our servers are operational,

Easily updated via Ansible,

Our web content will automatically be updated with each commit,

We are prepared for traffic spikes,

And we will get an alert if anything goes down.